

Synergy Canopy IP65 LED 15W Round Low Profile

Code: 804093104 (ER3901.93)



Cut-Out Ø 130 mm



Features

Canopy Downlight with LED lamp, complete with SELV driver to suit, pre wired and ready to install:

- Simple fixing
- Energy saving
- Low operating temperature
- Long lifetime LED
- Full intensity from switch on
- Driver with S.E.L.V. output
- Safety Class III luminaire
- Protection Class IP65
- IBL 3 Year warranty on fittings and drivers

Technical data

Dimensions: Height: 60 mm
Diameter: 150 mm

Cut-out: Ø 130 mm
Installation Depth: 70 mm
min. ceiling thickness: 3 mm
max. ceiling thickness: 30 mm

Weight: ca. 0,7 kg incl. driver
Material: die-cast aluminium

Max. surface Temperature.: 65 °C

Colour: Silver-grey

Manufactured to



Certified

Electrical Data

LED DRIVER:

Type: constant current
Input voltage: 170-240Vac 50/60Hz
Input current: max. 0,35A
cos phi: >0,5

Output current: 700 mA constant
Output voltage: max. 36 Vdc
Electrical safety: Class I
Output isolation: S.E.L.V.
Protection Class: IP67

LUMINAIRE:

Electrical safety: Class III
Protection Class: IP65
Power: 15W @ 700 mA
Warm White: 2875-3200K
Beam: 105°

WARNING: Do NOT switch using TRIAC-based (transistor, thyristor) circuits. Damage to driver inevitable!

ECO-Dashboard




Lamp Data

LED lighting unit with Epistar 5630 Chip
15W @ 700mA

Color Temperature CCT: 2875-3200 K
Light Output: approx. 800 lm

CRI: >= 80

Average Lifetime (50%): 45 000 h

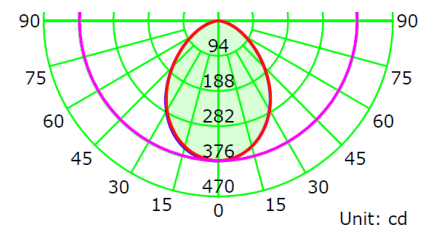

Contact

IBL Lighting GmbH
Christinenstr. 11
D-40880 Ratingen
Tel: 02102- 94 20 66 0
Fax: 02102- 94 20 66 6
web: www.ibl.eu
email: info@ibl.eu