
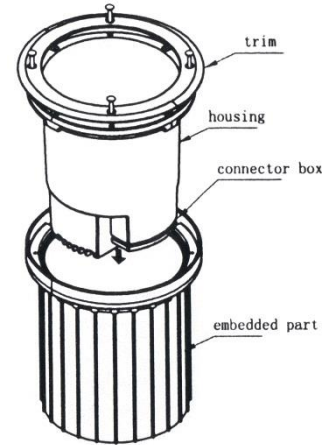
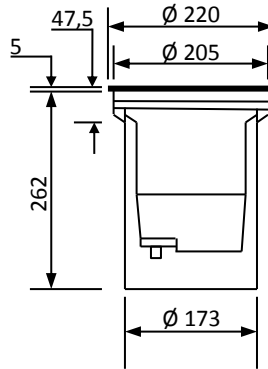


Synergy Ground LED 18W Recessed Floor Light Fixture

Order Code: 805493101 (ER3802.93)

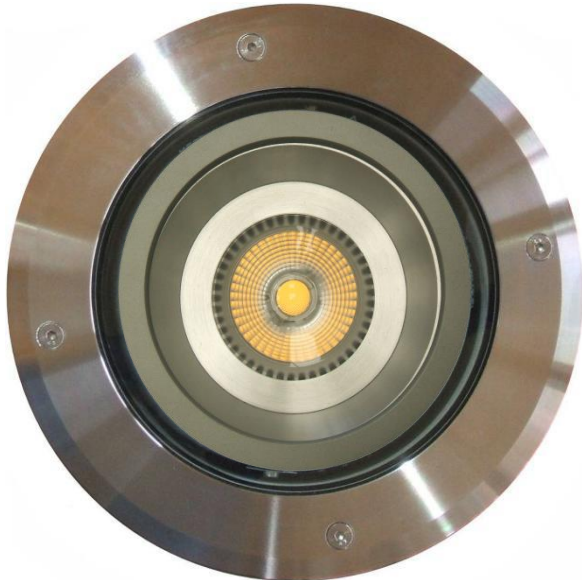

Features

LED recessed Floor Light Fixture

- long life Power LED
- saving electricity
- internal driver
- passable by persons and cars
- stainless steel trim and screws
- clear glass
- IBL 3 year warranty on luminaire
- Anti Moisture System
- ±10° Beam adjustability

Technical Data

Dimensions:
 Housing: Diameter Ø 220 mm
 Height 215 mm
 Installation tube
 Diameter Ø 205 mm
 Height 262 mm
 Material: Aluminium
 tempered Glass
 stainless Steel
 Installation: recessed installation-floor
 Max Surface Temperature: t_s max= 45°C
 Colour: stainless steel


Electrical Data

Input voltage: 230/240V, 50/60 Hz
 Power value: 0,11A max.
 Secondary output current: 500mA dc
 Secondary output voltage: max. 40V dc
 cos ϕ max. 0,97
 Safety: Short circuit, thermal and overload protection, SELV

Electrical safety class: I
 Protection Class: IP67
 Connection: flexible Silicon Cable H07RNF 3x1.5mm²


Installation

Warning - a minimum layer of 50 cm gravel must be allowed for drainage!

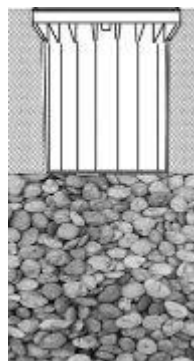


LED specification

CREE-CXA1512 COB LED
 Color Temperature: 3 000 K
 Light Output: ≈ 1 800 lm
 CRI: ≥ 80
 Average Lifetime: 45 000 h
 High efficient Hybrid Optic Lense
 24° beam

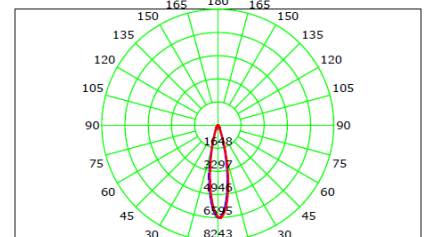

ECO-Dashboard

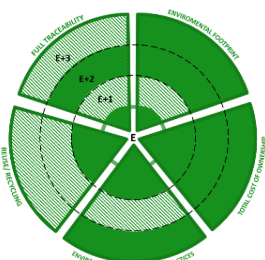

Contact Details

IBL Lighting GmbH
 Christinenstr. 11
 40880 Ratingen
 Germany
 Tel: (+49) 02102- 94 20 66 0
 Fax: (+49) 02102- 94 20 66 6
 web: www.ibl.eu
 email: info@ibl.eu