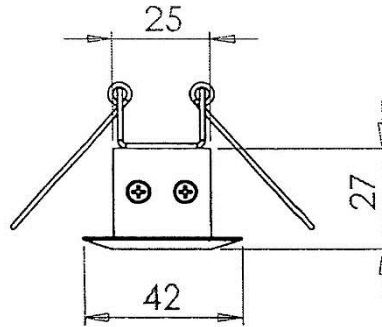


Slim EVERYTHING (recessed)

Code:
806893140 (SLMM120.0930)

806793140 (SLMM180.0930)


Features

Recessed LED Profile suitable for installing in plastered ceiling

- Energy saving
- Full intensity from switch on
- Warm white 3.000K LED
- Opal lens
- Low operating temperature
- Long life > 30,000 hrs.
- Remote driver with S.E.L.V. output
- Non-Dimmable (Standard)
- Dimmable on demand

Technical data

Dimensions:
 806893140: 1221x42 mm, h: 40 mm
 cut-out: 1215x33 mm
 weight: ca. 2,6 kg incl. driver

806793140: 1821x42 mm, h: 40 mm
 cut-out: 1815x33 mm
 weight: ca. 3,9 kg incl. driver

Installation Depth for all Versions: 60mm

Max. ceiling thickness: 30mm

Material: aluminium and plastics

Max. surface: 65°C

Bezel colour: aluminium grey

Electrical Data

Electrical safety

LED Driver: Class II
 LED Module: Class III

Output Isolation Driver S.E.L.V.

Remote LED Driver Type

Constant current

1200 mm 700mA 24W
 1800 mm 1050mA 36W

Input supply 220-240VAC
 50/60Hz

Input current 0,10 - 0,20 A

LED Strip 2400 lm / m
 Warm White

LED

Linear multichip LED strip
 2400lm/m

CCT: 3.000 - 3.100 K
 120 lm/W

CRI: >= 80

Average Lifetime (L70): 30 000 h

Compliance

CE Mark
 Conformance to Low
 voltage & EMC Directives
 Safety and operation

BS EN 61347, BS EN 62384
 BS EN 60598

Immunity
 BS EN 61547

Emission
 BS EN 55015, BS EN 61000-3-2

ECO-Dashboard



Contact

IBL Lighting GmbH
 Christinenstr. 11
 D-40880 Ratingen
 Tel: 02102- 94 20 66 0
 Fax: 02102- 94 20 66 6
 web: www.ibl.eu
 email: info@ibl.eu